


# Mig / Mag Torch

High Performance Air-Cooled 180 Amp. Mig Torch

ProSpot

welding & joining technologies

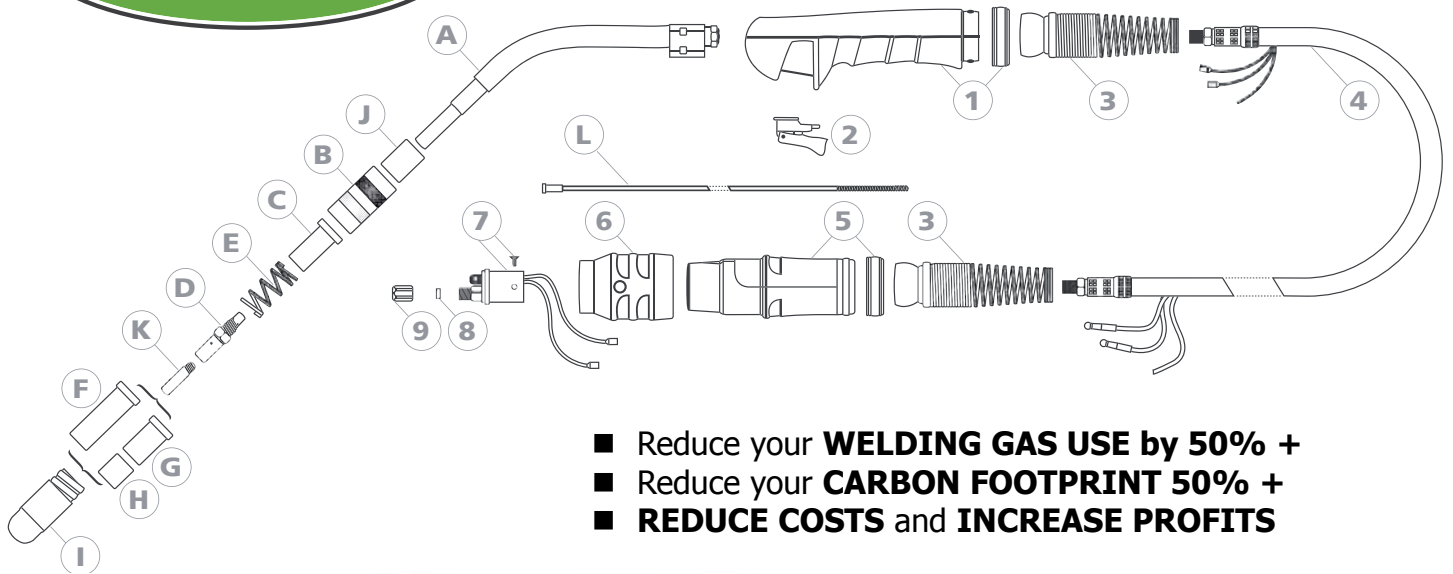

- Reduce your **WELDING GAS USE** by **50% +**
- Reduce your **CARBON FOOTPRINT** **50% +**
- **REDUCE COSTS** and **INCREASE PROFITS**



4L/mn

## Parts & Components

P/N	Description
1	NPT Handle (with ring, without Trigger)
2	GN Trigger for Handle
A	1010 Swan Neck for 180
B	1021 Shroud retainer for 180
C	1030 Insulation Spring 180
D	1040 Gas Tip Adaptor for 180
E	1050 Spring for 180
F	1070 Insulation Bush for 180
G	1070.2 Insulation Bush for 180 (short)
H	1070.1 Ceramic Bush for 180
I	1081 Shroud for 180
J	1060 Insulation Ring for 180 Swan Neck
K	006 Contact Tip M6 — 0,6 mm
K	008 Contact Tip M6 — 0,8 mm

## Torches

TM1803	180 Amp. Redux MIG Torch - 3 m
TM1804	180 Amp. Redux MIG Torch - 4 m
TM1805	180 Amp. Redux MIG Torch - 5 m

P/N	Description
K	010 Contact Tip M6 — 1mm
L	GM500 Guide Spiral liner 0,6-0,8 — 3 m
L	GM501 Guide Spiral liner 0,6-0,8 — 4 m
L	GM502 Guide Spiral liner 0,6-0,8 — 5 m
L	GM600 Guide Spiral liner Ptfе 0,6-0,8 — 3 m
L	GM601 Guide Spiral liner Ptfе 0,6-0,8 — 4 m
L	GM602 Guide Spiral liner Ptfе 0,6-0,8 — 5 m
3	NTRR Cable Support Spring
4	CC16xM Power Cable (3m / 4m / 5m)
5	NTCC Rear connector (with ring)
6	NTBDF Coupling Cap
7	NTCA Central Adaptor + Pan Head Screw
8	NTPBF Teflon® Ring
9	NTBFP Coupling Nut (long)



Prospot Limited - Unit C Riverside Industrial Estate  
 Atherstone Street - Fazeley - Tamworth - Staffordshire - B78 3RW  
 Telephone: 01827 254 829 - Fax: 01827 254 832  
 Email: sales@prospot.co.uk - Web: www.prospot.co.uk